

# MODEL TM-608 STANDARD DUTY NON-POWERED, TURNTABLE

**10 Year/250,000 Cycle Warranty**

*Turntables are used for positioning jobs where heavy duty loads must be rotated on a regular basis. There are two basic types of standard duty turntables, non-powered and powered. Turntables are available in low profile and high profile configurations.*


**ISO 9001:2008  
Certified**



Capacity: 6,000 lbs.  
Edge Load Max: 1,500 lbs.  
Minimum Platform: 85 x 85 in.  
Maximum Platform: 96 x 96 in.  
Height: 3.5 in.  
Roller Radius: 26  
Weight: 1,600 lbs.



**6,000 lb. Capacity**

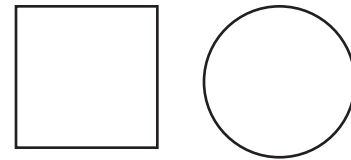

Standard platform is square,  
circular is available upon request.

## SPECIAL FEATURES & BENEFITS

- ▶ Lower cost than powered turntables.
- ▶ These units are manually rotated.
- ▶ These units can be rotated in either direction.
- ▶ All non-powered turntables are low profile.
- ▶ Standard platforms are rectangular and round platforms are optional on all models except TML.
- ▶ Rotational limits can be provided via optional detents, locking pins, and hard stops.
- ▶ TM platforms are supported by lifetime lubricated roller bearing cam followers.
- ▶ TML platforms are supported by lifetime lubricated ball bearing roller.
- ▶ Platforms rotate around a lifetime-lubricated kingpin bearing.


**CLICK HERE FOR: [Optional Accessories](#)**

## FEATURE DETAILS

**OPTIONAL ROTATIONAL LIMITS FOR MANUAL TURNTABLES: DETENTS, LOCKING PINS AND HARD STOPS**



▶ *Detent*



▶ *Locking pin*



▶ *Hard stop*